
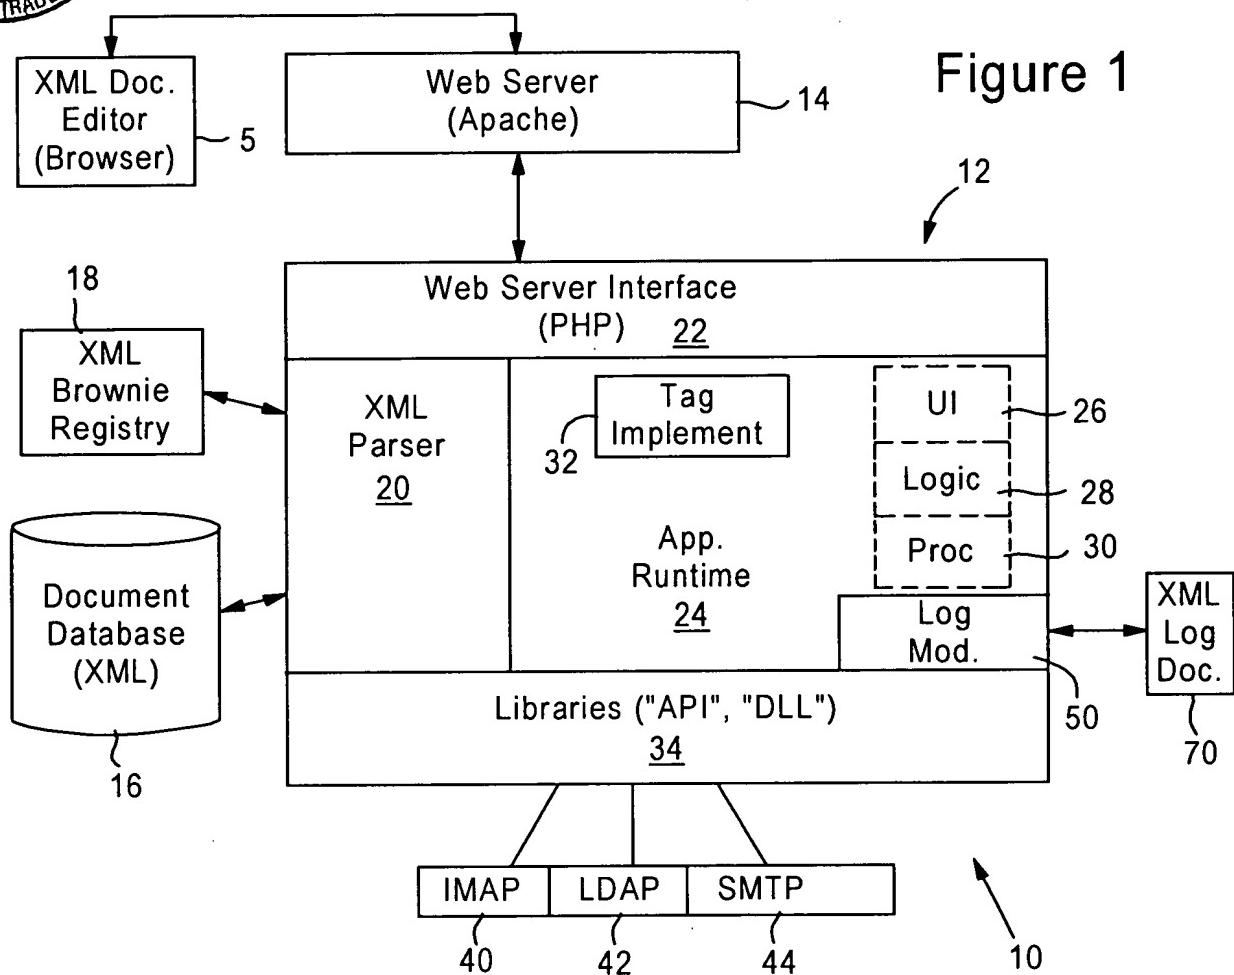


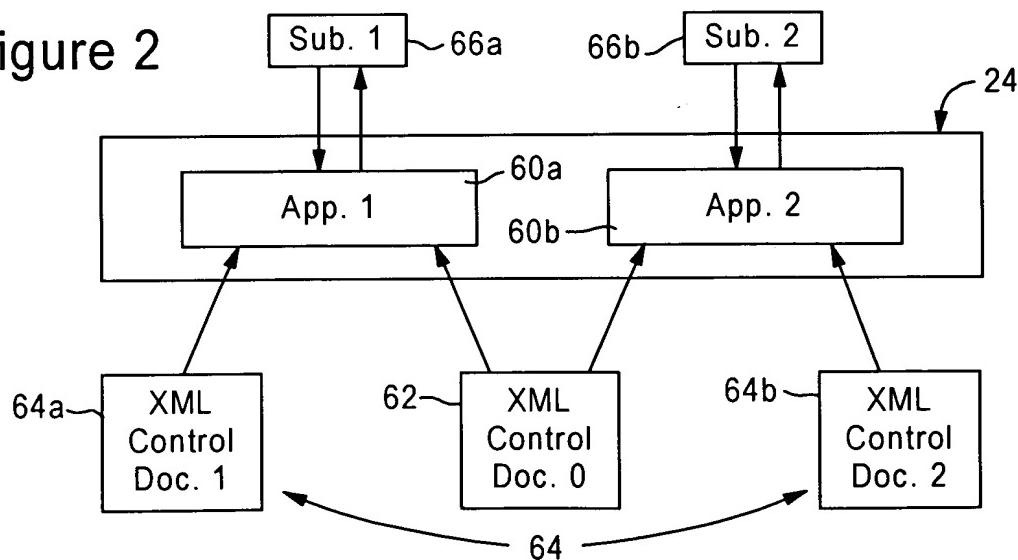

1/3



**Figure 2**



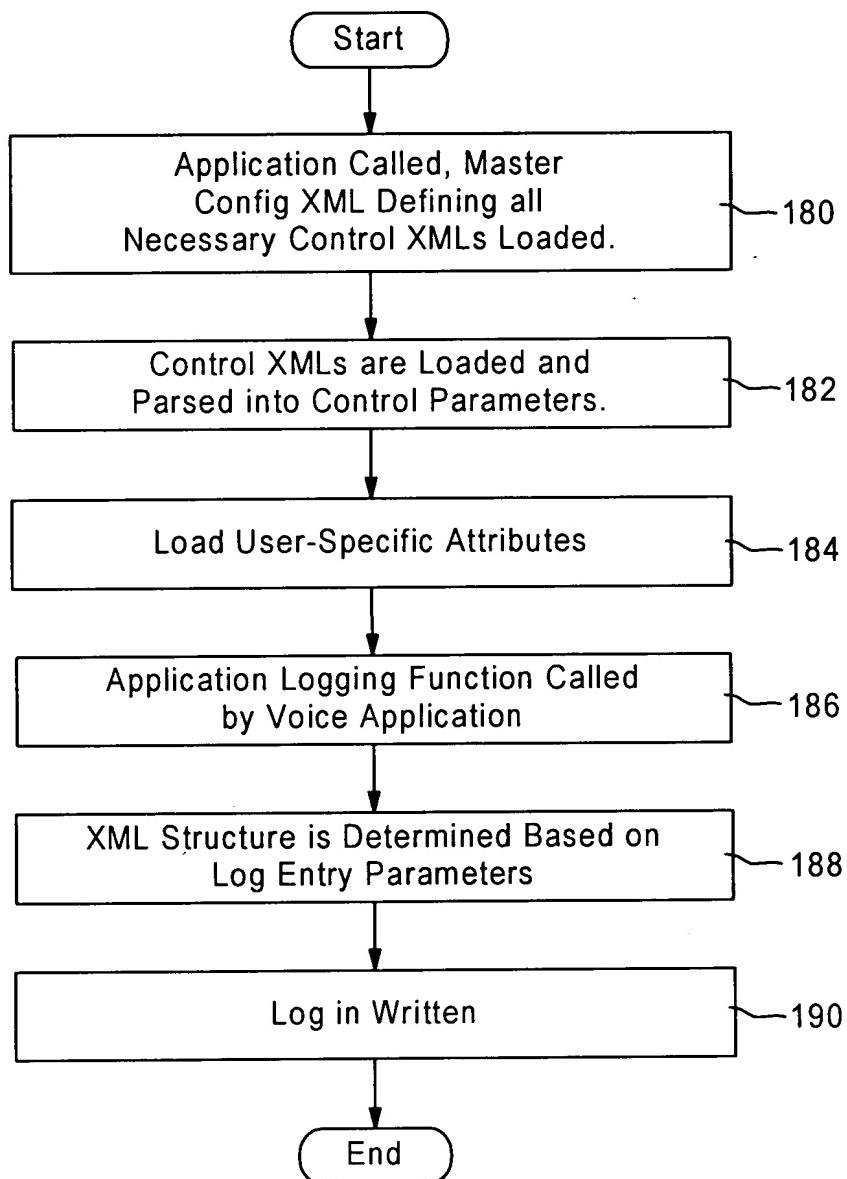
**Figure 3**

Figure 4A

Sample Parameter File:

```
<SERVICES>
<IMAP IP="10.10.0.255"
      hostname="imap1.domain.com"
      port="143"/> 92a
<LDAP IP="10.10.0.254"
      hostname="ldap1.domain.com"
      port="389"/> 92b
<TTS IP="10.10.0.253"
      hostname="texttospeech.domain.com"
      port="2525"/> 92c
</SERVICES>
```

62

Figure 4B

Sample Log:

```
<LOGFILE name="SesId_Log" application="appname"> 72
  <STANDARD date="xx-xx-xxxx" time="xx:xx:xx:xx"> 78a
    <RELEVANCE>BILLING,TRACE</RELEVANCE> 82a
    <LOGCODE>12002</LOGCODE> 80a
  84  <PARAMETERS>8045551234,8045551111</PARAMETERS>
    <TEXT>Call Made: 8045551111</TEXT> 86a
  </STANDARD>
  <ERROR date="xx-xx-xxxx" time="xx:xx:xx:xx"> 78b
    <RELEVANCE>BILLING,TRACE,NOTIFY</RELEVANCE> 82b
    <LOGCODE>08042</LOGCODE>
  84  <PARAMETERS>8045551234,8045551111</PARAMETERS> 86b
    <TEXT>Outdial Request failure, no resource available</TEXT>
  </ERROR>
</LOGFILE>
```

70

80a

80b

86a

86b